








## Motion System Change Speed


1. Connect the 16 pin diagnostic interface of the scooter
2. Turn on the key


3. Select: Motion/Delphi K-line ECU, Click  Pic: 


4. Select: ECU Flash, Click  Pic: 

5. Select: SE08 Flash cal, Click  Pic: 


6. Select the Map, Click  :

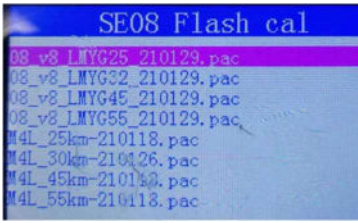
08\_V8\_lmyg25\_0128.pac  
08\_V8\_lmyg32\_0128.pac  
08\_V8\_lmyg45\_0128.pac  
08\_V8\_lmyg55\_0128.pac, Pic: 

7. Confirm the Map, Click  :

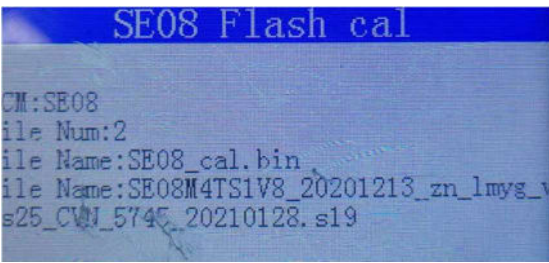

8. In the process of writing:  

9. Finish writing: 

10. After finished, Click  quit

11. Turn off key, Wait 15 seconds; turn on key, start engine